


## GASKETS ASBESTOSFREE

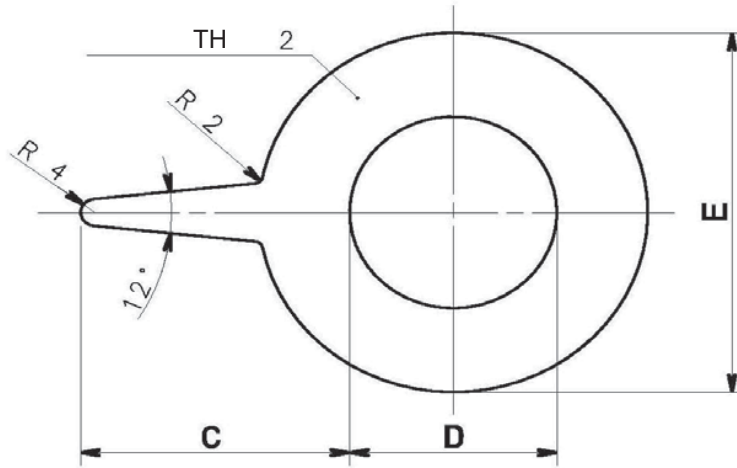

Supplier code	Denomination PIPE DN	Material ( colour: orange )	NOSE(C)	Di(D) (mm)	De(E)	Th	Lowara code
NI13020025	25	NOVUS 30 SUPRA	62	30	70	2	168061320
NI13020032	32		71	38	82		168061330
NI13020040	40		72	45	92		168061340
NI13020050	50		74	57	108		168061350
NI13020065	65		74	76	127		168061360
NI13020080	80		75	89	142		168061370
NI13020100	100		76	108	162		168061380
NI13020125	125		78	141	192		168061390
NI13020150	150		83	170	218,5		168061400
NI13020200	200		82	222	273		168061410

MATERIAL ASBESTOS FREE ACC. STD BS 6920  
WATER POTABLE WRC APPROVED

TEMPERATURE MAX  
85°C - WATER POTABLE  
250°C - CONTINUOUS USE  
400°C - INTERMITTENT USE

PRESSURE MAX  
100 BAR ( 10 MPA)

PN16

MAX TEMP. AND MAX PRESS.  
ARE NOT OCCURRING AT THE SAME TIME

USED FOR:  
WATER, STEAM, OILS, SOLVENTS, GASOIL,  
GLYCOLS, DILUITED ACID, ALKALI